



VERSA-LIFT^{17/25}

ENGINE: GM 3.0L
 DRIVE SYSTEM: 2 SPEED HYDROSTATIC
 TIRES: FRONT 28 X 12 NONMARKING POLY
 REAR 22 X 8 NONMARKING POLY
 GRADE: EMPTY %
 LOADED %
 TILT: FORWARD 10°, BACK 4.5°
 WEIGHTS: GROSS 30,500 LBS WITH
 BOOM & FORKS
 FORKS 1,000 LBS
 BOOM 2,700 LBS
 STAND 400 LBS
 TURNING RADIUS: 105" RETRACTED
 135" EXTENDED

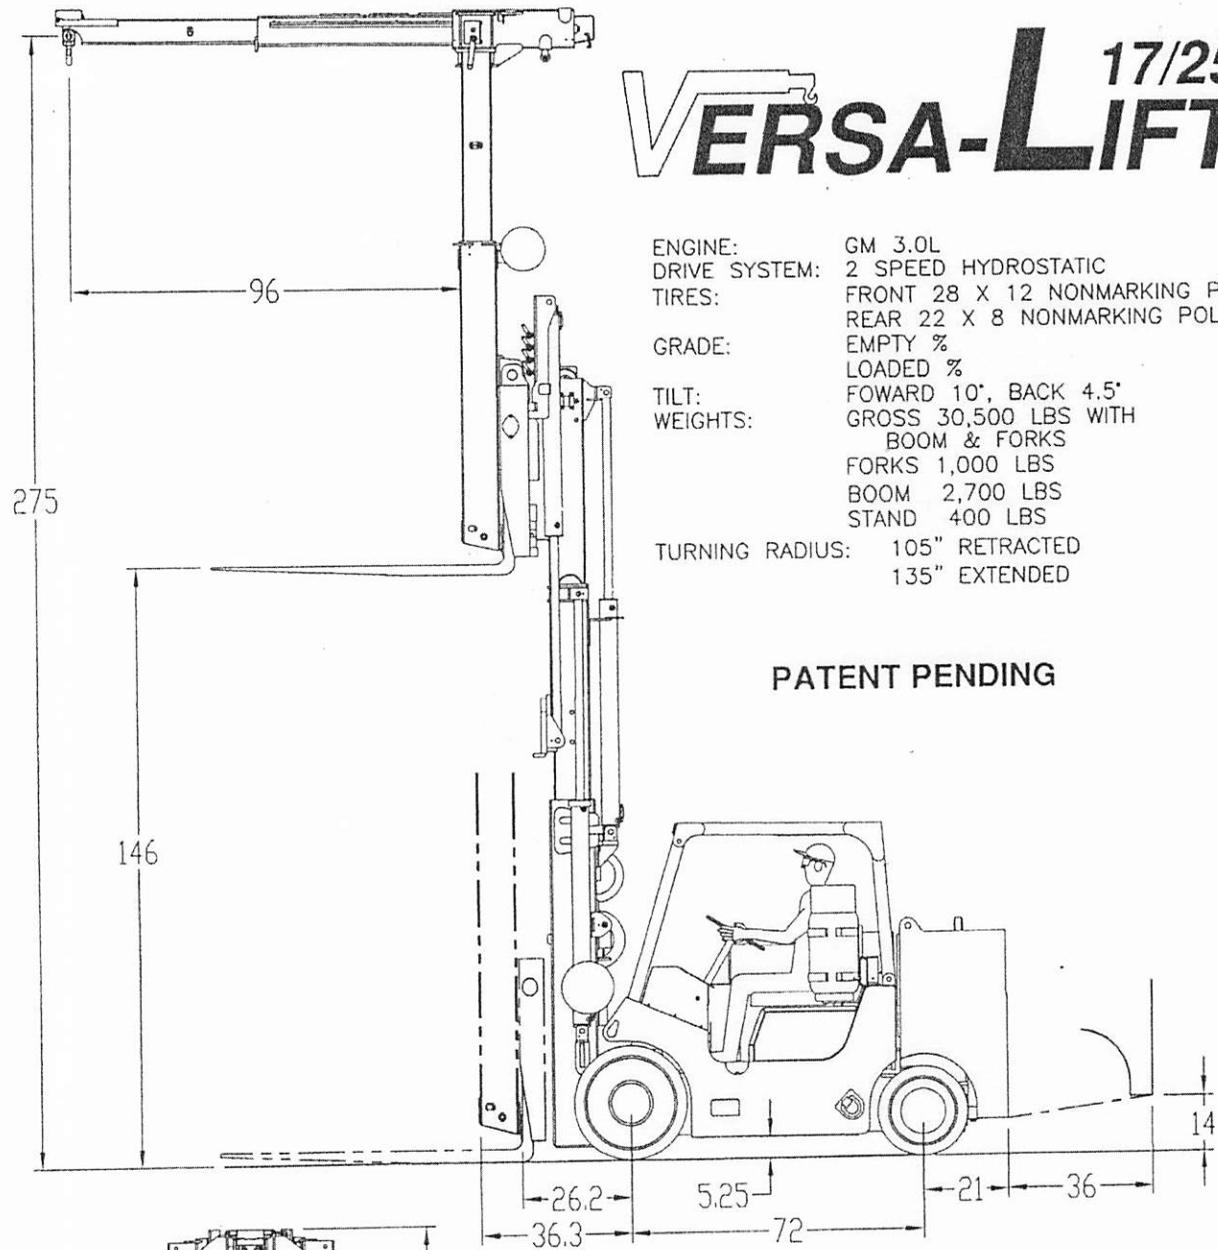

PATENT PENDING

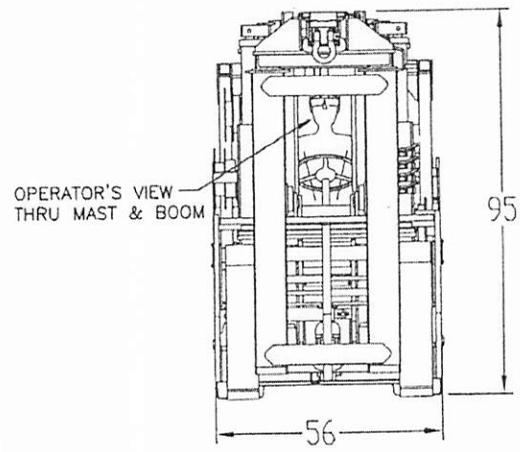

LIFT CAPACITIES* WITH FORKS & WITHOUT BOOM				
LOAD CENTER FROM FORK FACE	COUNTERWEIGHT EXTENSION			
	0"	12"	24"	36"
24"	18700#	20800#	22900#	25000#
36"	15100#	16800#	18500#	20200#
48"	12600#	14100#	15500#	16900#
60"	10900#	12100#	13300#	14600#
72"	9500#	10600#	11700#	12800#
84"	8500#	9500#	10400#	11400#

LIFT CAPACITIES* WITH BOOM & WITHOUT FORKS				
LOAD CENTER FROM BOOM FACE	COUNTERWEIGHT EXTENSION			
	0"	12"	24"	36"
12"	19100#	21300#	23500#	25800#
24"	15200#	17000#	18700#	20500#
36"	12600#	14000#	15500#	17000#
48"	10700#	11900#	13200#	14500#
60"	9300#	10400#	11500#	12600#
72"	8200#	9200#	10200#	11200#
84"	7300#	8300#	9100#	10000#
96"	6600#	7500#	8300#	9100#

* CAPACITIES RATED WITH MAST VERTICAL.

CUSTOM MOBILE EQUIPMENT, INC.

439 EAST HIGH STREET, BALDWIN CITY, KS 66006 (785) 594-7474 FAX (785) 594-7475

17/25 Versa-Lift with 3 Counterweight Slabs

Slab Weight (lbs) Number of Slabs Standard Wheel Base (in)
 1500 3 72

Lift Capacities w/Forks Only (lbs) and Side Shift					
		Counterweight Extension (in)			
		0	12	24	36
Load Center From Fork Face (in)	24	17100	19100	21100	23100
	36	14000	15600	17300	18900
	48	11900	13200	14600	16000
	60	10300	11500	12700	13800
	72	9100	10100	11200	12200
	84	8100	9100	10000	10900

Lift Capacities w/Forks & Boom (lbs) and Side Shift					
		Counterweight Extension (in)			
		0	12	24	36
Load Center From Boom Face (in)	12	16600	18700	20700	22800
	24	13400	15100	16800	18400
	36	11200	12600	14000	15400
	48	9600	10800	12000	13200
	60	8300	9400	10500	11500
	72	7400	8400	9300	10300
	84	6700	7500	8400	9300
	96	6100	6900	7600	8400

Lift Capacities w/Boom Only (lbs) and Side Shift					
		Counterweight Extension (in)			
		0	12	24	36
Load Center From Boom Face (in)	12	17400	19400	21500	23500
	24	14000	15700	17300	19000
	36	11700	13100	14500	15900
	48	10000	11200	12400	13600
	60	8700	9800	10900	11900
	72	7800	8700	9700	10600
	84	7000	7900	8700	9600
	96	6400	7100	7900	8700

***All Load Capacities are rated with the mast vertical.

17/25 Versa-Lift with 2 Counterweight Slabs

<u>Slab Weight (lbs)</u>	<u>Number of Slabs</u>	<u>Standard Wheel Base (in)</u>
1500	2	72

Lift Capacities w/Forks Only (lbs) and Side Shift					
		Counterweight Extension (in)			
		0	12	24	36
Load Center From Fork Face (in)	24	15300	17000	18700	20400
	36	12500	13900	15300	16700
	48	10600	11800	12900	14100
	60	9200	10200	11200	12200
	72	8100	9000	9900	10800
	84	7200	8000	8800	9700

Lift Capacities w/Forks & Boom (lbs) and Side Shift					
		Counterweight Extension (in)			
		0	12	24	36
Load Center From Boom Face (in)	12	14700	16500	18300	20000
	24	11800	13300	14700	16200
	36	9900	11100	12300	13500
	48	8400	9500	10500	11600
	60	7300	8300	9200	10100
	72	6500	7400	8200	9000
	84	5900	6600	7400	8100
	96	5300	6000	6700	7400

Lift Capacities w/Boom Only (lbs) and Side Shift					
		Counterweight Extension (in)			
		0	12	24	36
Load Center From Boom Face (in)	12	15400	17200	19000	20700
	24	12400	13900	15300	16700
	36	10300	11600	12800	14000
	48	8800	9900	10900	12000
	60	7700	8600	9600	10500
	72	6900	7700	8500	9300
	84	6200	6900	7700	8400
	96	5600	6300	7000	7600

****All Load Capacities are rated with the mast vertical.*

17/25 Versa-Lift with 1 Counterweight Slabs

<u>Slab Weight (lbs)</u>	<u>Number of Slabs</u>	<u>Standard Wheel Base (in)</u>
1500	1	72

Lift Capacities w/Forks Only (lbs) and Side Shift					
		Counterweight Extension (in)			
		0	12	24	36
Load Center From Fork Face (in)	24	13400	14900	16300	17800
	36	11000	12200	13400	14500
	48	9300	10300	11300	12300
	60	8100	8900	9800	10700
	72	7100	7900	8600	9400
	84	6400	7000	7700	8400

Lift Capacities w/Forks & Boom (lbs) and Side Shift					
		Counterweight Extension (in)			
		0	12	24	36
Load Center From Boom Face (in)	12	12800	14300	15800	17300
	24	10300	11500	12700	13900
	36	8500	9600	10600	11600
	48	7300	8200	9100	9900
	60	6300	7100	7900	8700
	72	5600	6300	7000	7700
	84	5100	5700	6300	6900
	96	4600	5200	5700	6300

Lift Capacities w/Boom Only (lbs) and Side Shift					
		Counterweight Extension (in)			
		0	12	24	36
Load Center From Boom Face (in)	12	13500	15000	16500	18000
	24	10900	12100	13300	14500
	36	9000	10100	11100	12100
	48	7700	8600	9500	10400
	60	6700	7500	8300	9100
	72	6000	6700	7400	8100
	84	5400	6000	6600	7300
	96	4900	5500	6000	6600

***All Load Capacities are rated with the mast vertical.

17/25 Versa-Lift with 0 Counterweight Slabs

Slab Weight (lbs)

1500

Number of Slabs

0

Standard Wheel Base (in)

72

Lift Capacities w/Forks Only (lbs) and Side Shift					
		Counterweight Extension (in)			
		0	12	24	36
Load Center From Fork Face (in)	24	11600	12800	13900	15100
	36	9500	10400	11400	12400
	48	8000	8800	9600	10500
	60	6900	7700	8400	9100
	72	6100	6800	7400	8000
	84	5500	6000	6600	7100

Lift Capacities w/Forks & Boom (lbs) and Side Shift					
		Counterweight Extension (in)			
		0	12	24	36
Load Center From Boom Face (in)	12	10900	12100	13300	14500
	24	8700	9700	10700	11700
	36	7300	8100	8900	9800
	48	6200	6900	7600	8300
	60	5400	6000	6600	7300
	72	4800	5300	5900	6500
	84	4300	4800	5300	5800
	96	3900	4300	4800	5300

Lift Capacities w/Boom Only (lbs) and Side Shift					
		Counterweight Extension (in)			
		0	12	24	36
Load Center From Boom Face (in)	12	11600	12800	14000	15300
	24	9300	10300	11300	12300
	36	7700	8600	9400	10200
	48	6600	7300	8000	8800
	60	5700	6400	7000	7600
	72	5100	5700	6200	6800
	84	4600	5100	5600	6100
	96	4200	4600	5100	5500

***All Load Capacities are rated with the mast vertical.